

# Ni-Cd VSE AAL



ARTS Energy's VSE Ni-Cd series have been designed to meet the fast charge and increased capacity needs of light and compact equipment.

To meet customers' requirements, ARTS Energy provides **custom-designed and standardised battery packs**.

For your battery design and system needs, please **contact ARTS Energy**.



## ELECTRICAL CHARACTERISTICS

• Nominal voltage (V)	1.2
• Typical capacity (mAh)*	980
• IEC minimum capacity (mAh)*	940
• IEC designation	KRMR 15/50
• Impedance at 1000 Hz (mΩ)	16

\* Charge 16 h at C/10, discharge at C/5.

## DIMENSIONS

• Diameter (mm)	13.9 ± 0.1
• Height (mm)	49 ± 0.3
• Top flat area diameter (mm)	6.4
• Weight (g)	22

Dimensions are given for bare cells.

## CHARGE CONDITIONS

	Temp. (°C)	Current
• Fast	0 to +40	0.94A max
• Topping (after fast charge)	0 to +40	Consult ARTS Energy
• Trickle (after topping)	0 to +40	Consult ARTS Energy
• Charge below 0°C	-40 to 0	Consult ARTS Energy

End of Fast charge cut-off is requested: -dV or dT°C/dt

## DISCHARGE CONDITIONS

Temp. (°C)	Current
10 to +60	2.9A max
-20 to +60	1C max
-30 to -60	C/3 max
-40 to +60	C/5 max

## CYCLING CONDITIONS

- Full cycle > 500 cycles  
(100% DOD - C charge and C discharge at +20°C)

## APPLICATIONS

- Professional electronics
- Professional lighting equipment

## MAIN BENEFITS

- Excellent cycling performance
- High power
- Extreme low temperatures (-40°C)

## TECHNOLOGY

- Foam positive electrode
- Plastic bonded negative electrode



**ARTS ENERGY**  
MAKE A BETTER PLACE TO LIVE



## Performances +20°C


Serie A : Previous  
Serie B : Evolution

## STORAGE

Recommended: + 5°C to + 25°C

Relative humidity: 65 ± 5 %







## TYPICAL DIMENSIONS

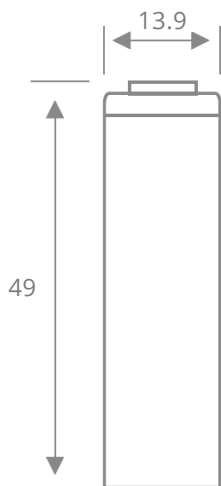

Typical dimensions (mm). Without tube.

## Temperature Current Performances

Serie A : Previous  
Serie B : Evolution

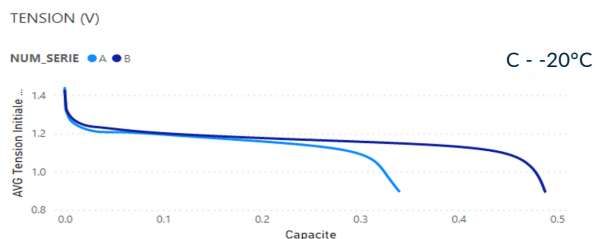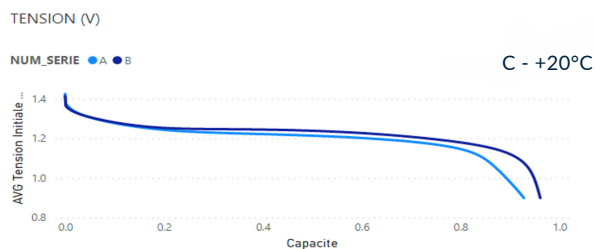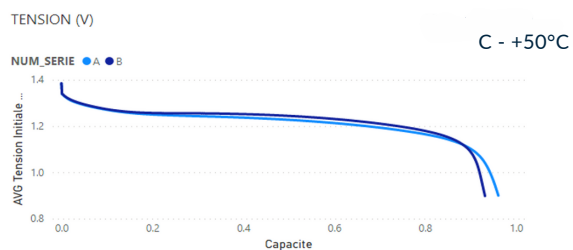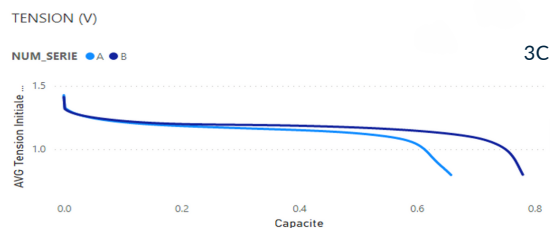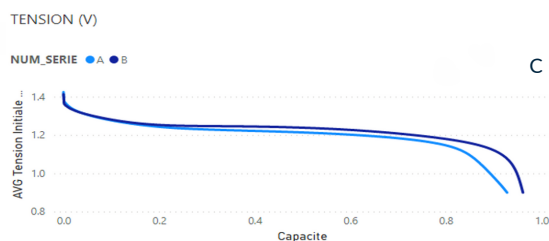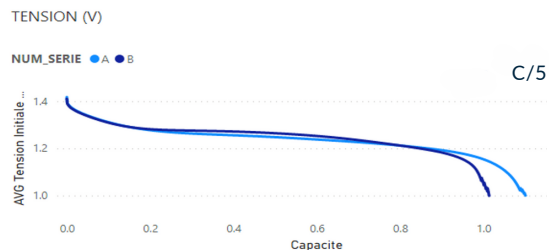

The operation of the battery must strictly be in accordance with ARTS Energy technical recommendations, to obtain the performances stated by ARTS Energy.

Data is given for single cells. Please consult ARTS Energy for utilisation of cells outside specification.

Data in this document is subject to change without notice and become contractual only after written confirmation by ARTS Energy